



SPECIFICATION SHEET

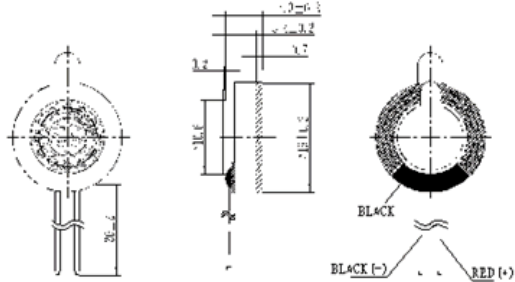

TDM16A-8H-W030 LF-B

Dimensions	16x4.3mm
Impedance	$8 \pm 15\% \Omega$ at 2000Hz
Rated Input Power	0.7W
Max. input power	1.2W
Resonance Frequency	$900 \pm 20\%$ Hz
Output Sound Pressure Level	91 ± 3 dB/0.1W 0.05m at 0.8, 1.0, 1.2, 1.5kHz Average
Frequency Response	Fo~20KHz
Distortion (at 1kHz, 0.7W)	$\leq 10\%$
Buzzes & Rattles	Must be normal at sine wave 2.5V
Operating Temperature	-20~+60°C
Storage Temperature	-40~+80°C

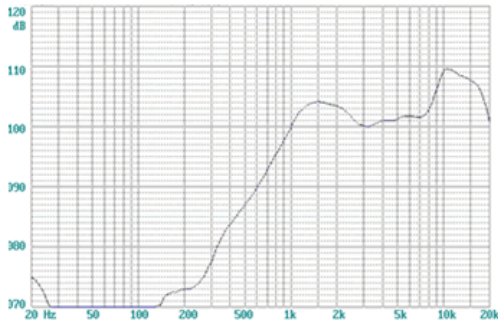

Shen Zhen Tianer Technology CO.,Ltd.
NO.421,4th Floor,KangLe Building,HuaQingNorth
TEL:0086-755-82799228
Mobile:(0)13603060099
E-mail:office@youbuzzer.com
<http://www.itianer.com>